



Europäisches Patentamt
European Patent Office
Office européen des brevets



Publication number: **0 201 189 B1**

12

EUROPEAN PATENT SPECIFICATION

49 Date of publication of patent specification: 25.09.91 51 Int. Cl.⁵: D01F 6/60, D01F 1/10

21 Application number: 86302423.8

22 Date of filing: 02.04.86

54 Improved high speed process of making polyamide filaments.

30 Priority: 22.04.85 US 725864

43 Date of publication of application:
12.11.86 Bulletin 86/46

45 Publication of the grant of the patent:
25.09.91 Bulletin 91/39

64 Designated Contracting States:
AT BE CH DE FR GB IT LI LU NL SE

56 References cited:
FR-A- 1 142 270
GB-A- 918 930
US-A- 3 475 368
US-A- 3 549 651

73 Proprietor: BASF Corporation
P.O. Drawer "D"
Williamsburg, Virginia 23187(US)

72 Inventor: Burton, Wendel Laurence
214 Timberlake Road
Anderson, S.C. 29621(US)

74 Representative: Taylor, Phillip Kenneth et al
W.P. THOMPSON & CO. Coopers Building
Church Street
Liverpool L1 3AB(GB)

EP 0 201 189 B1

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

Description

The present invention is concerned with an improved high speed process of making polyamide filaments wherein an additive having a molecular weight of less than 400 and selected from the group consisting of water, alcohols, and organic acids is added to a polymer.

The present invention is classified in the area of synthetic resins, more particularly in the area of processes of preparing a desired or intentional composition of at least one nonreactant material and at least one solid polymer or specified intermediate condensation product, or product thereof, wherein the nonreactant material is added to the solid polymer. Within this main area, art related to the present invention may be found among organic nonreactant materials in which a carbon atom is singly bonded to an oxygen atom and wherein there is either: (a) only a single C-OH group and at least six carbon atoms or (b) at least two-OH groups. Also within this main area, related art may be found within the area in which the polymer is derived from ethylenic, nitrogen-containing reactants only wherein water is the nonreactant material.

Applicant has located several prior art U.S. patents which are related to the present invention, including U.S. 3,182,100; U.S. 3,093,445; U.S. 2,615,002; U.S. 2,943,350; U.S. 4,049,766; U.S. 3,549,651; and U.S. 3,388,029. Applicant has also located several journal articles related to the nonobviousness of the present invention, including:

(a) V.S. Shirshin, V. Vais, et al., Effect of Polycapraamide Transport and Storage Conditions on Change in its Qualitative Indices, copyright 1984 Plenum Publishing Corporation, pp. 398-401.

(b) M.I. Kohan, Nylon Plastics, J. Wiley & Sons, copyright 1973, pp. 210 and 427-428.

The U.S. patents referred to above pertain to a material which is either residual or added to the polymer. However, none of these patents refer to high speed processes, i.e., processes in which the yarn is travelling at a speed which is greater than 3200 meters per minute. As is shown in the examples below, the effects of melt additives are opposite when comparing high and low speed processes.

The articles referred to above (a and b) teach that in high speed processes, the nylon polymer should contain as little water as possible. This is contrary to the present invention. The advent of high speed spinning technology has been relatively recent, and teachings related to production speeds versus polymer content are very rare in the high speed area.

The present invention is concerned with an improved high speed process for the production of polyamide filaments, especially filaments of textile quality. The process is carried out by adding one or more members of a selected group of additives consisting of water, alcohols, and organic acids to the polyamide in order to improve package build, yarn quality, and yarn processing conditions. For example, it has been found that less package deformation occurs under the instant process. Furthermore, low elongation and increased tenacity are possible, among other product improvements, by utilizing the instant process. Finally, higher yarn production speeds are possible utilizing the instant process.

The improved process comprises the steps of:

a) Mixing the additive into the polyamide in order to form a mix; and

(b) Extruding the mix to form filaments; and

(c) Quenching the filaments; and

(d) Taking up the filaments at high speed.

In the improved process, the additive must be thoroughly mixed so that a homogeneous mix is formed. It has been conceived that the additive may be added in any amount so long as a resulting molten polymer mix has a relative viscosity between 2.0 and 3.0. Since polyamides are hygroscopic and water is generally present to some degree prior to spinning, water is only considered to be an "additive" if it is present in an amount greater than 0.15% by weight.

It is an object of the present invention to enable an improved high speed melt spinning process for polyamides.

It is a further object of the present invention to enable higher speeds for the melt spinning of polyamide textile filaments.

It is a further object of the present invention to improve package build in the high speed melt spinning of polyamide textile filaments.

It is a further object of the present invention to prevent tube crushing without heat relaxation of the yarn in a high speed polyamide melt spinning process.

It is a further object of the present invention to utilize additives in order to improve the high speed melt spinning of polyamides.

It is a further object of the present invention to enable one to simultaneously lower the elongation and increase the modules of polyamide textile filaments.

It is a further object of the present invention to enable improved washfastness and dye uniformity of

polyamide filaments made with high speed melt spinning processes.

It is a further object of the present invention to utilize additives in a high speed spin-draw-wind process for the manufacture of polyamide filaments.

It is a further object of the present invention to achieve acceptable tensile properties at low draw ratios.

5 It is a further object of the present invention to lower the relative viscosity of the melt by adding an additive, followed by spinning a yarn with lower elongation than would have occurred had the additive not been added, all other conditions remaining the same.

10 It is a further object of the present invention to enable one to increase the take-up speed (without experiencing tube crushing) by at least 1200 meters per minute with respect to the speed at which tube crushing begins to occur without additives.

It is a further object of the present invention to enable one to obtain a higher modulus and lower elongation product at processing speeds slower than one would obtain in a process identical except without additives.

15 The present process is concerned with adding water, alcohols, and/or organic acids to polyamides in order to improve the resulting textile product and/or processing in a high speed filament production operation. It has been unexpectedly found that in high speed polyamide filament production, water, alcohols, and organic acids have a beneficial effect on the melt if they are added in limited amounts and for limited times so that the resulting polymer mix has a relative viscosity (as measured in 96% sulphuric acid) between 2.0 and 3.0. Classical theory (e.g. U.S. patent 3,475,368) states that addition of plasticizers to a
20 polymer will result in an increase in the elongation and a decrease in both the modulus and breaking strength. However, it has been unexpectedly discovered that the opposite occurs in high speed melt-spinning processes for polyamides, i.e. the addition of one or more of the additives recited above to the polymer prior to a high speed extrusion process will improve the tensile properties, i.e. raise the modulus and lower the elongation. In high speed spin draw processes for the production of polyamide textile
25 filaments, there has been a problem with tube crushing as the yarn puts great force on the tube, causing it to collapse on the winder chuck, making it impossible to remove the tube from the winder without destroying the yarn package thereon. The use of additives has been found to relieve the tube crushing problem by reducing the build up of the yarn stresses which cause tube crushing.

30 It has been demonstrated that the use of the additives of the present invention will allow one to obtain beneficial extensions of processing speeds in the production of polyamide filaments. For example, since the use of additives lowers the relative viscosity while simultaneously creating package relaxation (as shown in Figures 4-8), the use of additives can allow one to increase the take up speed by at least 1200 meters per minute (without tube crushing) with respect to the speed at which tube crushing begins to occur without additives. Furthermore, since the use of additives lowers the elongation and elevates the modulus of the
35 product, the use of additives will allow one to obtain a product having similar characteristics at lower processing speeds.

In a preferred process of the present invention, a polycaprolactam polymer chip has an additive thoroughly mixed therewith followed by melting (in a screw extruder) and extrusion through a spinnerette, forming a plurality of molten polycaprolactam filaments. The molten polycaprolactam filaments are then
40 quenched. After quenching the filaments are coalesced and simultaneously have finish applied thereto by a finish metering device. Generally, the coalesced filaments are then drawn (between 1.02x and 1.8x), followed by air jet entanglement. However, it is not absolutely necessary to draw the filaments. The filaments are then wound.

45 The process of the present invention is preferably carried out in a high speed spin-draw-wind process, wherein the fastest travelling surface is moving at a speed of at least 3200 meters per minute. Generally, the fastest travelling surface is the downstream draw godet, as the yarn is drawn between the first and second godet, and is then relaxed between the second godet and the winder.

In this preferred process, the polymer mix is extruded through a spinnerette, quenched, has finish applied thereto, is drawn by partial wrap on two godets, and is then wound on a bobbin. Most preferably,
50 the yarn is interlaced after drawing.

Figure 1 illustrates the process of the present invention as it appears downstream of, and including, the chip hopper. The chip hopper (1) is supplied with chip (2). The hopper (1) in turn supplies the extruder (3) throat with chip (2). An additive pump (4) is shown simultaneously supplying the extruder throat with a liquid additive, this process being carried out by simply dripping the liquid onto the chip stream which is entering
55 the extruder (3). Once the chip exits the extruder as a molten stream (5), the stream is pumped through a conduit (6) which contains a plurality of static mixers (7). Once through the static mixers (7), the mix stream enters the spinnerette (8) and is extruded into a plurality of molten streams (9) which are solidified in a quench zone and are then coalesced and simultaneously have finish applied by a finish applicator (10).

The coalesced filaments (11) then travel downward through an interfloor tube, schematically indicated by the "break" (12). The yarn next travels around a first (upstream) powered godet (13) and then around a second (downstream) powered godet (14), following which the yarn (11) is interlaced by an interlacer (15). Lastly, the yarn is wound into a bobbin (16).

- 6 The yarn may be drawn by being passed over two or more godets which travel at different surface speeds, i.e., the surface speed of the downstream godet being at least two percent higher than the surface speed of the upstream godet.

Table I, containing Examples 1 through 86, pertains to processes carried out using the preferred apparatus as described above. As can be seen from these examples, the relative viscosity of the polymer
10 dropped with increasing amounts of additive, but unexpectedly the elongation decreased. These examples show that the improved process is operable for different polyamide polymers. These polymers, coded as B300, B216, etc. are described in detail in Table II. The additives utilized in Table I have been specifically chosen in order to illustrate that the process is operable for a variety of additives, including water, alcohols, and organic acids. The data presented in Table I illustrates the process of the present invention when the
15 additive is water, a primary alcohol, a secondary alcohol, a diol, a tetraol, an aliphatic acid, or an aromatic acid. Furthermore, these examples indicate that the invention is operable for a variety of winding speeds, draw ratios, and filament types and sizes. Note that in every instance the elongation with additive is lower than its corresponding control example, and that the modulus with additive is greater than its corresponding control example.

20 It is believed that at least four characteristics are always changed in the same direction (with respect to a control example) through the use of these additives. These characteristics are: elongation, modulus, washfastness, and package relaxation. Elongation decreases with additives, modulus increases with additives, washfastness increases with additives, and package relaxation increases with additives.

Table III illustrates the improved washfastness for several examples given in Table I. In Table III a
25 control example was run by spinning a B300 chip without additives, the resulting filaments being drawn at a draw ratio of 1.05, the filaments then being wound at a speed of 4750 meters per minute, just as in Examples 1, 5 and 10. The product was knitted into a hoseleg, which was then cut into two pieces each piece of which was then dyed. One piece was dyed in Kition fast Blue (C.I. Acid Blue 45) dye, the other in Celanthrene fast Blue CR (C.I. Disperse Blue 7) dye. Each piece was then washed five times in a
30 conventional washing machine. The hoselegs had ΔE measurements (CIELAB) taken before and after washing. A ΔE value was determined for each of the pieces. The same process was undertaken for several examples listed above. Table III gives the results of these tests for washfastness. The ΔE values have been normalized with respect to the control sample in order to make comparisons easy. In samples 31 through 34, an Orlon Blue G (C.I. Acid Blue 151) dye was used in addition to Kition and Celanthrene. As can be
35 seen from the data in Table III, the washfastness of the fabrics made using yarns containing additives was always superior to the washfastness of the fabrics made using yarns which were made without additives.

Examples 1 through 86 were carried out using the preferred high speed spin-draw-wind process described above. These examples illustrate a variety of conditions with respect to spinning speeds, draw ratio, additive amount, additive type, polyamide polymer characteristics (see Table II), and yarn type. For
40 each set of conditions, the resulting: (a) relative viscosity (RV) of the melt mix; (b) percent elongation of the product; and (c) breaking load at 10% elongation (L-10) were given. The examples are shown in "sets" (i.e. Examples 1-4, 5-9, 10-20, etc.), in which a given polymer type was spun with a given additive, the filaments then being drawn at a fixed draw ratio, and wound at a fixed speed, while the amount of additive was varied. Control examples (using no additive, i.e. pure polymer) were run for each set of conditions, the control runs
45 being the first run of each set shown in Examples 1 - 86. In the "Filament Type" column, the first number represents the total denier and the second number represents the number of filaments, while the R represents a round cross-section and the T represents a trilobal cross-section.

The most significant result from Examples 1 - 86 is the unexpected effect that increasing the amount of additive had on the product elongation: As RV dropped due to increasing amount of additive added, percent
50 elongation surprisingly also dropped. To one of skill in the art, a drop in RV would normally be expected to create a gain in the percent elongation of the product, all other factors remaining the same. In fact, RV and percent elongation are inversely proportional in low speed processes, as is discussed below. In Examples 1 - 86, it can be seen that at high speeds, the use of an additive consistently lowered both the RV of the polymer mix and the resulting elongation of the product, as compared with the control run. This result was
55 found for all five polyamide polymer chip types investigated, and all seven additives investigated. Furthermore, this effect was substantiated at draw ratios of 1.00, 1.05, 1.07, 1.13, 1.14, 1.20, 1.30, and 1.45, and at winder speeds of 4,000, 4,300, 4,750, 5,000, 5,250, and 5,660 meters per minute. In addition, Examples 1 - 86 show that the L-10 is almost always higher through use of an additive. In Examples 1 - 86,

it was not always found that the addition of "more additive" caused a FURTHER decrease in elongation, and/or FURTHER increased L-10, but it was found that the addition of "more additive" always created a further lowering of the RV. However, the addition of "more additive" always resulted in an RV lower than the control, a percent elongation lower than the control, and an L-10 higher than the control.

5 The unusual, unexpected result found in Examples 1 - 86 is the fact that the use of a low viscosity, low molecular weight additive lowered the elongation of the resulting product. It would normally be expected that the use of such an additive would raise the elongation of the product. In fact, this second situation turns out to be true, specifically in the classical 2-stage production process, as shown in Table V. Thus, the advantage of the additives described herein is limited to high production speeds, as recited in the claims. It
10 therefore becomes apparent that another unexpected element is found in the present invention: the combination of the additive together with the requirement of high speed process operation. Table V illustrates how product elongation rises with the use of an additive, compared with the identical process conditions without the use of additives.

For purposes of the present invention, the term "additive" is herein defined to include only substances
15 having a molecular weight of less than 400, these substances having a melting point below the temperature at which melt spinning is carried out. Furthermore, the additives must be within the group consisting of water, alcohols, and organic acids. Water is considered to be the most preferred additive. If water is the additive, the water must be present in the mix in an amount which is greater than 0.15% by weight. This is because the polyamide polymers spun at high speed in the prior art occasionally contain some moisture,
20 often by accident, and this moisture is believed always to have been less than 0.15%, thus the scope of the present invention has been limited to specifically avoid overlap with this accidental prior art which was considered undesirable heretofore.

It has been found that the mixing of the additive into the polymer must result in a uniform mix, or the product will not have sufficient uniformity of characteristics, i.e. yarn properties will vary undesirably, as well
25 as yarn processability. In order to insure adequate mixing, 26 4x4 motionless, continuous Interfacial Surface Generator mixers were installed in the pipe leading from the extruder to the spinnerette, these ISG's being used in Examples 1 through 86. These mixers are described fully in U.S. 3,583,678, which is herein incorporated by reference. Mixers identical to those utilized in the Examples herein, can be obtained from Charles Ross & Son Co., 710-718 Old Willets Path, Hauppauge, Long Island, N.Y. 11787. Table IV illustrates
30 the need to adequately mix the additive with the polymer. Without adequate blending of the polymer with the additive, yarn chemical properties will vary undesirably from threadline to threadline, as will yarn processability. Table IV shows that RV range, amino end group range, Kition dye junction range, and warping defects vary considerably more, and to an undesirable degree, without mixing as opposed to with mixing using 26 static mixers.

35 The use of the additives of the present invention may provide a variety of benefits in addition to elongation and L-10. For example, package deformation may be decreased through use of additives. The yarn made in Example 58 was wound onto a bobbin for a period of two hours. The package could be readily removed from the chuck. This indicates that even at high draw ratios and relatively high winder speeds, the additive can allow one to produce a product which has very little internal stress when compared
40 to an identical process without additive use. It is believed that if the process of Example 58 was carried out without additive, the bobbin would not have been removable from the chuck, all other conditions being the same.

Examples 62 through 69 demonstrate the effect of additive on reduction of internal package stress. During this series of Examples, the winder speed remained constant while the speed of both godets (13
45 and 14) was reduced in order to maintain constant yarn tension between the second godet and the winder. In Example 69, in which 1.5% water was added, the godet speed could not be slowed enough to keep the yarn from falling off of the bobbin, as the yarn was actually expanding as it was being wound onto the bobbin. In fact, the godets were slowed until a 15-20 gram tension was applied to the yarn between the second godet and the winder (compared with 6 grams of yarn tension used in Examples 62-65), and still the
50 yarn expanded off the bobbin.

Actual package deformation is created by yarn shrinkage on the bobbin. Shrinkage of yarn on the bobbin creates a "side bulge" deformation and a "concave top" deformation to the bobbin, and if shrinkage is large enough, tube crushing may also occur. Package deformation has been reduced through the use of additives. Figure 2 illustrates package "side bulge deformation" (d) while Figure 3 illustrates "concave top
55 deformation" (d'). In reality, a deformed package contains both types of deformation simultaneously.

Figure 4 illustrates the effect of increasing the speed of the godets (13 and 14) on the amount of concave top deformation, this process being carried out without the use of an additive. As can be seen from the upward slope of the line of Figure 4, the amount of "concave top" package deformation increases

linearly between godet speeds of 4,000 and 5,000 meters per minute, if additives are not employed. Figure 5 illustrates the same situation, except that 0.75% water was added to the polymer immediately before the extruder, the additive then being mixed thoroughly with the polymer. Figure 5 indicates that the use of water effectively eliminated any INCREASE in the "concave top" package deformation between speeds of 4,000 and 5,000 meters per minute. The runs performed in Figures 4 and 5 utilized B300 polymer, a draw ratio of 1.00, and produced a 40 denier 12 filament product. Figure 6 illustrates how increasing the percent additive creates a decrease in the concave top deformation for the high speed process described herein.

Figure 7 illustrates the effect of godet speed on "side bulge" package deformation (d, as shown in Figure 2), this figure indicating that as the speed of the godets is increased from 4,000 to 5,000 meters per minute, the "side bulge" package deformation increases sharply from 3 millimeters to 7.5 millimeters. The process runs indicated by Figure 7 were performed without additives. Figure 8 illustrates the effect of additives on "side bulge" deformation. As additive (in this example, water) concentration increased, side bulge deformation decreased sharply. The process runs of Figure 7 utilized B300 chip, a draw ratio of 1.00, and produced a 4.444 tex (40 denier), 12 filament yarn. The process runs of Figure 8 utilized B216 chip, a draw ratio of 1.00, and produced a 4.444 tex (40 denier), 12 filament yarn, at the takeup speed of 5,000 meters per minute.

The particular winder used to build a package is also related to package deformation. When using either a Barnag SW46SSD/4 or a Reiter J7/H4 winder, at a constant winder setting (dependent upon the speed to give a constant helix angle), large packages of 4.444 tex (40 denier), 12 filament yarns were made and measured for changes in top curvature and side deformation of the yarn package in millimeters. It was found that without additives the concave top curvature and outward side deformation increased as the winder speed increased (tex[denier] remaining constant). However, with the addition of an additive the deformations decreased in proportion to the amount of additive. Also, unexpectedly, when 0.75% water was added to polyamide under the conditions illustrated in Figure 5, an increase in speed created no substantial increase in package deformation. This phenomenon is considered to be of great importance, as the use of the additives may make higher production speeds possible, without tube crushing or undesirable package deformation levels, without the addition of heat relaxation devices.

Another benefit from the use of the additives of the present invention is found in the dye uniformity of fabrics made from the yarn which was produced using additives. Fibre was produced by adding 0.5% H₂O to B216 chip. The filaments were produced by the process illustrated in Figure 1, on which apparatus the filaments were drawn 1.14x and wound up at 5000 meters per minute. The yarn produced was a 4.444 (40)/12 dull yarn (i.e. the yarn contained titanium dioxide). The yarn was used to make single bar tricot fabric. The fabric was then dyed with an acid dye, a disperse dye, and a premetallized dye. The fabric was visually rated for dye uniformity on a scale of 1 to 7, where 1 represents the highest quality of dye uniformity i.e. no visible nonuniformities. All of the dyed samples rated at 2. Other fabrics were produced from yarns manufactured without additives but on the same apparatus. None of these other fabrics rated as highly as 2 for all three types of dyes used.

The use of additives as described herein has enabled large packages to be made consistently at high speed. For example, a B300 chip (RV=2.8) was used to produce 128 large packages of yarn. The polymer had 2% water added, with the resulting uniform mix being extruded into filaments. The process was carried out by the apparatus of Figure 1. The filaments were drawn 1.04x between the godets, and were then wound at 5100 meters per minute. The yarn produced was a 4.444 tex (40 denier), 12 filament bright, triangular cross-section yarn, having an elongation of 50%. Four six-hour doffs were made each day for each of 2 machines which were operated over a four day period, resulting in 128 packages of yarn, as each machine produced 4 packages simultaneously. The full package yield was over 96%, and the warping performance was under 0.2 defects per million end yards.

The use of the process of the present invention may also provide a method of making a very uniform product. For example, a B216 chip having 0.5% water mixed uniformly therewith was spun (by the apparatus of Figure 1) into a 4.444 (40)/12 yarn. The filaments were drawn 1.14x and wound at 5000 meters per minute. The yarn was then warpknitted, and exhibited only 0.27 defects per million end yards. The yarn had the following characteristics: % elongation of 50.0 ± 2.0; L-10 of 57.8 ± 1.8 grams; tex of 4.444 ± 0.019 (denier of 40.0 ± 1.8); breaking load of 169 ± 4.5 grams; entanglement level of 19.0 ± 2.0 nodes per meter; Kilon (acid dye C.I. 45) dye junction of ± .66; Celanthrene (C.I. Disperse Blue 7) dye Junction of ± .48. Table VI illustrates the uniformity of chemical properties for three trial process runs using additives. As can be seen on Table VI, all three runs produced yarn having a high degree of chemical uniformity. These samples were collected periodically throughout each of the three trials.

Table VII provides one explanation for many of the above-described advantages of the present invention. Table VII indicates that the use of additives enables a higher degree of polymer orientation. This

is verified by several different measurements which are directly related to the degree of polymer orientation (e.g. birefringence, sonic moduli, amorphous orientation, gamma crystal size, etc.).

Birefringence measurements were taken on conditioned round filaments which had been mounted in a Leitz Universal Research microscope, Model orthoplan (with a polarizer and rotating analyzer). Retardation
5 was measured by a Berek tilting compensator.

Sonic Modulus measurements were taken on conditioned samples, using a Dynamic Modulus Tester model PPM-5R, manufactured by the H. M. Morgan Company, Inc. The slope from 5 curves were averaged, and the resulting modulus ($N/m^2 \times 10^9$) was adjusted to a conditioned RH of 22%.

Density measurements were taken using calibrated density gradient columns of tetrachloroethylene and
10 heptane. Measurements were not corrected for additive or monomer.

In order to determine percent crystallinity (XTAL) crystalline orientation (f_c), x-ray measurements were taken on a Siemens D-500 x-ray Diffraction unit, which was interfaced to a HP85 computer. Crystalline orientation functions were determined from x-ray azimuthal scans. Crystallinity values were determined from the relative percent of alpha crystal structure from x-ray together with the density measurements.

15 The amorphous orientation function ($f_a B_{ir}$) was determined from the birefringence data using 0.069 as the intrinsic birefringence for both the crystalline and amorphous phases according to the following equations:

where:

20

$$\Delta n = \beta f_c \Delta n_c^0 + (1 - \beta) f_a \Delta n_a^0$$

Δn = measured birefringence

25 β = percent crystallinity

f_c = crystalline orientation

Δn_c^0 = intrinsic birefringence for the crystalline phase

Δn_a^0 = intrinsic birefringence for the amorphous phase

In order to determine the crystalline size, equatorial x-ray diffraction peak widths at half peak height
30 were used to estimate the gamma crystalline size.

35

40

45

50

55

TABLE I

| EXAMPLE # | ADDITIVE TYPE | AMOUNT | RV | % ELONGATION | L-10 (gms) | DRAW RATIO | WINDER SPEED (M/MIN) | CHIP TYPE | FILAMENT TYPE (1) (40 denier = 4.444 tex) |
|-----------|-----------------------|--------|------|-----------------|---------------|---------------|----------------------------|--------------|--|
| 5 | | | | | | | | | |
| 1 | CONTROL | -0- | 2.79 | 69 | 40 | 1.05 | 4750 | B300 | 40/12R |
| 2 | H ₂ O | 0.5% | 2.61 | 63 | 44 | 1.05 | 4750 | B300 | 40/12R |
| 3 | H ₂ O | 1.0% | 2.42 | 55 | 50 | 1.05 | 4750 | B300 | 40/12R |
| 4 | H ₂ O | 1.5% | 2.24 | 51 | 55 | 1.05 | 4750 | B300 | 40/12R |
| 10 | | | | | | | | | |
| 5 | CONTROL | -0- | 2.72 | 70 | 37 | 1.05 | 4750 | B300 | 40/12R |
| 6 | Benzyl Alcohol | 1% | 2.65 | 63 | 39 | 1.05 | 4750 | B300 | 40/12R |
| 7 | Benzyl Alcohol | 2% | 2.52 | 57 | 45 | 1.05 | 4750 | B300 | 40/12R |
| 8 | Benzyl Alcohol | 3% | 2.40 | 56 | 49 | 1.05 | 4750 | B300 | 40/12R |
| 9 | Benzyl Alcohol | 4% | 2.37 | 50 | 53 | 1.05 | 4750 | B300 | 40/12R |
| 16 | | | | | | | | | |
| 10 | CONTROL | -0- | 2.75 | 68 | 37 | 1.05 | 4750 | B300 | 40/12R |
| 11 | Triethyleneglycol | 0.5% | 2.65 | 66 | 44 | 1.05 | 4750 | B300 | 40/12R |
| 12 | Triethyleneglycol | 1.0% | 2.59 | 62 | 48 | 1.05 | 4750 | B300 | 40/12R |
| 13 | Triethyleneglycol | 2.0% | 2.42 | 58 | 51 | 1.05 | 4750 | B300 | 40/12R |
| 14 | Triethyleneglycol | 3.0% | 2.40 | 54 | 53 | 1.05 | 4750 | B300 | 40/12R |
| 15 | Pentaerythritol | 1.0% | 2.45 | 56 | 52 | 1.05 | 4750 | B300 | 40/12R |
| 16 | Pentaerythritol | 2.0% | 2.27 | 54 | 58 | 1.05 | 4750 | B300 | 40/12R |
| 17 | Benzoin | 3.2% | 2.31 | 55 | 54 | 1.05 | 4750 | B300 | 40/12R |
| 18 | Benzoin | 4.9% | 2.24 | 51 | 54 | 1.05 | 4750 | B300 | 40/12R |
| 19 | Chlorobenzoic acid | 0.5% | 2.50 | 61 | 45 | 1.05 | 4750 | B300 | 40/12R |
| 20 | Lauric Acid | 0.7% | 2.25 | 55 | 55 | 1.05 | 4750 | B300 | 40/12R |
| 25 | | | | | | | | | |
| 21 | CONTROL | -0- | 3.0 | 51 | 71 | 1.30 | 4750 | B35 | 40/12R |
| 22 | Benzyl Alcohol | 1.0% | N/A | 49 | 73 | 1.30 | 4750 | B35 | 40/12R |
| 23 | Benzyl Alcohol | 3.0% | 2.7 | 41 | 88 | 1.30 | 4750 | B35 | 40/12R |
| 24 | Benzyl Alcohol | 5.0% | 2.4 | 31 | 95 | 1.30 | 4750 | B35 | 40/12R |
| 25 | Benzyl Alcohol | 7.0% | 2.36 | 30 | 99 | 1.30 | 4750 | B35 | 40/12R |
| 30 | | | | | | | | | |
| 26 | CONTROL | -0- | 3.3 | 49 | 73 | 1.30 | 4750 | B35 | 40/12R |
| 27 | H ₂ O | 0.75% | 2.9 | 46 | 82 | 1.30 | 4750 | B35 | 40/12R |
| 28 | H ₂ O | 1.5% | 2.7 | 42 | 89 | 1.30 | 4750 | B35 | 40/12R |
| 29 | H ₂ O | 1.8% | 2.6 | 39 | 96 | 1.30 | 4750 | B35 | 40/12R |
| 30 | H ₂ O | N/A | 2.5 | 37 | 96 | 1.30 | 4750 | B35 | 40/12R |
| 35 | | | | | | | | | |
| 31 | CONTROL | -0- | 2.31 | 54 | 49 | 1.05 | 4750 | B35 | 40/12R |
| 32 | H ₂ O | 1.0% | 2.14 | 50 | 51 | 1.05 | 4750 | B35 | 40/12R |

(1) total denier/number of filaments

EP 0 201 189 B1

| | | | | | | | | | | |
|----|----|--------------------|-------|------|--------------------|-----|------|------|-------|--------|
| | 33 | CONTROL | -0- | 2.31 | 45 | 77 | 1.20 | 4750 | B3S | 40/12R |
| | 34 | H ₂ O | 1.0% | 2.14 | 36 | 84 | 1.20 | 4750 | B3S | 40/12R |
| 5 | 35 | CONTROL | -0- | 2.48 | 71 | 35 | 1.05 | 4750 | AS503 | 40/12R |
| | 36 | Triethylene glycol | 0.75% | 2.30 | 65 | 37 | 1.05 | 4750 | AS503 | 40/12R |
| | 37 | CONTROL | -0- | 2.37 | 62 | 41 | 1.00 | 5000 | B216 | 40/12R |
| | 38 | H ₂ O | 0.25% | 2.36 | 59 | 45 | 1.00 | 5000 | B216 | 40/12R |
| | 39 | H ₂ O | 0.34% | 2.29 | 59 | 46 | 1.00 | 5000 | B216 | 40/12R |
| 10 | 40 | H ₂ O | 0.47% | 2.26 | 56 | 46 | 1.00 | 5000 | B216 | 40/12R |
| | 41 | CONTROL | -0- | 2.43 | 60 | 42 | 1.00 | 5000 | B216 | 40/28T |
| | 42 | H ₂ O | 0.48% | 2.26 | 57 | 45 | 1.00 | 5000 | B216 | 40/28T |
| | 43 | H ₂ O | 0.75% | 2.20 | 52 | 47 | 1.00 | 5000 | B216 | 40/28T |
| | 44 | H ₂ O | 0.98% | 2.13 | 53 | 48 | 1.00 | 5000 | B216 | 40/28T |
| 15 | 45 | CONTROL | -0- | 2.36 | 58 | 45 | 1.00 | 5250 | B216 | 40/28T |
| | 46 | H ₂ O | 0.48% | 2.30 | 56 | 45 | 1.00 | 5250 | B216 | 40/28T |
| | 47 | CONTROL | -0- | 2.78 | 59 | 51 | 1.14 | 4300 | B300 | 40/12R |
| | 48 | H ₂ O | 0.5% | 2.66 | 54 | 59 | 1.14 | 4300 | B300 | 40/12R |
| | 49 | H ₂ O | 1.0% | 2.53 | 51 | 66 | 1.14 | 4300 | B300 | 40/12R |
| 20 | 50 | H ₂ O | 1.5% | 2.46 | 51 | 64 | 1.14 | 4300 | B300 | 40/12R |
| | 51 | CONTROL | -0- | 2.78 | 59 | 51 | 1.14 | 4300 | B300 | 40/12R |
| | 52 | Triethylene glycol | 1.0% | 2.55 | 53 | 58 | 1.14 | 4300 | B300 | 40/12R |
| | 53 | Triethylene glycol | 2.0% | 2.53 | 52 | 63 | 1.14 | 4300 | B300 | 40/12R |
| 25 | 54 | Triethylene glycol | 3.0% | 2.45 | 49 | 63 | 1.14 | 4300 | B300 | 40/12R |
| | 55 | CONTROL | -0- | 2.60 | 45 | 85 | 1.20 | 5660 | B300 | 40/12R |
| | 56 | H ₂ O | 0.5% | 2.54 | 38 | 102 | 1.20 | 5660 | B300 | 40/12R |
| | 57 | H ₂ O | 0.75% | 2.47 | 35 | 118 | 1.20 | 5660 | B300 | 40/12R |
| 30 | 58 | Benzyl Alcohol | 4.2% | 2.42 | 36 | 112 | 1.30 | 4750 | B300 | 40/12R |
| | 59 | Benzyl Alcohol | 4.2% | 2.42 | 23 | 136 | 1.45 | 4750 | B300 | 40/12R |
| | 60 | CONTROL | -0- | 2.75 | 63 | 42 | 1.00 | 5250 | B300 | 40/12R |
| | 61 | H ₂ O | 1.0% | 2.31 | 54 | 50 | 1.00 | 5250 | B300 | 40/12R |
| 35 | 62 | CONTROL | -0- | 2.74 | 70 | 37 | 1.00 | 4000 | B300 | 40/12R |
| | 63 | H ₂ O | 0.21% | 2.61 | 67 | 39 | 1.00 | 4000 | B300 | 40/12R |
| | 64 | H ₂ O | 0.24% | N/A | 63 | 43 | 1.00 | 4000 | B300 | 40/12R |
| | 65 | H ₂ O | 0.39% | 2.46 | 62 | 47 | 1.00 | 4000 | B300 | 40/12R |
| | 66 | H ₂ O | 0.50% | 2.42 | 62 | 47 | 1.00 | 4000 | B300 | 40/12R |
| | 67 | H ₂ O | 0.56% | 2.40 | 59 | 52 | 1.00 | 4000 | B300 | 40/12R |
| | 68 | H ₂ O | 0.98% | 2.31 | 61 | 45 | 1.00 | 4000 | B300 | 40/12R |
| 40 | 69 | H ₂ O | 1.50% | 2.22 | expands off bobbin | | 1.00 | 4000 | B300 | 40/12R |

45

50

55

EP 0 201 189 B1

| | | | | | | | | | |
|----|------------------|-------|------|----|----|------|------|------|--------|
| 70 | CONTROL | -0- | 2.74 | 66 | 45 | 1.07 | 4000 | B300 | 40/12R |
| 71 | H ₂ O | 0.21% | 2.61 | 61 | 52 | 1.07 | 4000 | B300 | 40/12R |
| 72 | H ₂ O | 0.24% | N/A | 60 | 54 | 1.07 | 4000 | B300 | 40/12R |
| 73 | H ₂ O | 0.39% | 2.48 | 57 | 56 | 1.07 | 4000 | B300 | 40/12R |
| 74 | H ₂ O | 0.50% | 2.42 | 59 | 57 | 1.07 | 4000 | B300 | 40/12R |
| 75 | H ₂ O | 0.56% | 2.40 | 57 | 55 | 1.07 | 4000 | B300 | 40/12R |
| 76 | H ₂ O | 0.98% | 2.31 | 60 | 52 | 1.07 | 4000 | B300 | 40/12R |
| 77 | H ₂ O | 1.50% | 2.22 | 59 | 49 | 1.07 | 4000 | B300 | 40/12R |
| 78 | H ₂ O | 1.68% | 2.18 | 57 | 48 | 1.07 | 4000 | B300 | 40/12R |
| 79 | CONTROL | -0- | 2.74 | 61 | 52 | 1.13 | 4000 | B300 | 40/12R |
| 80 | H ₂ O | 0.21% | 2.61 | 59 | 56 | 1.13 | 4000 | B300 | 40/12R |
| 81 | H ₂ O | 0.24% | N/A | 57 | 59 | 1.13 | 4000 | B300 | 40/12R |
| 82 | H ₂ O | 0.39% | 2.48 | 58 | 58 | 1.13 | 4000 | B300 | 40/12R |
| 83 | H ₂ O | 0.50% | 2.42 | 57 | 59 | 1.13 | 4000 | B300 | 40/12R |
| 84 | H ₂ O | 0.56% | 2.40 | 55 | 61 | 1.13 | 4000 | B300 | 40/12R |
| 85 | H ₂ O | 0.98% | 2.31 | 56 | 56 | 1.13 | 4000 | B300 | 40/12R |
| 86 | H ₂ O | 1.50% | 2.22 | 60 | 49 | 1.13 | 4000 | B300 | 40/12R |

TABLE II

POLYMERS USED IN EXAMPLES

| T10 (%) | DESIGNATED CHIP TYPE | CHEMICAL SPECIES | RELATIVE VISCOSITY | AMINO END GROUPS (meq/kg) | CARBOXYLIC END GROUPS (meq/kg) | METHANOL EXTRACTABLES (%) | H ₂ O (%) |
|---------|-------------------------|--------------------------------|-----------------------|------------------------------------|---|---------------------------------|-------------------------|
| 0 | B300 | polycaprolactam | 2.75 | 34 | 55 | 0.42 | |
| 1.6 | B216 | polycaprolactam | 2.36 | 29.5 | 67.8 | 0.44 | .08 |
| 0.009 | B3S | polycaprolactam | 2.61 | 54.6 | 55.6 | | .09 |
| 0.008 | B3S | polycaprolactam | 3.2 | 38.5 | 31.7 | 1.0 | |
| 0.298 | AS503 | polyhexamethylene adipimide | 2.51 | 49.9 | | | |

TABLE III

IMPROVED DYE WASHFASTNESS AFTER 5 MACHINE WASHINGS

| SAMPLE NUMBER | KITON ACID DYE ΔE CIELAB NORMALIZED TO CONTROL SAMPLE | CELANTHRENE DISPERSE DYE ΔE CIELAB NORMALIZED TO CONTROL SAMPLE | ORTOLON PREMETALLIZED DYE ΔE CIELAB NORMALIZED TO CONTROL SAMPLE |
|------------------|--|--|---|
| 14 (CONTROL) | 1.00 | 1.00 | |
| 15 | 1.39 | 1.32 | |
| 16 | 1.41 | 1.31 | |
| 17 | 1.69 | 1.24 | |
| 18 | 1.52 | 1.47 | |
| 19 | 1.10 | 1.33 | |
| 20 | 1.61 | 1.53 | |
| 31 (CONTROL) | 1.00 | 1.00 | 1.00 |
| 32 | 1.18 | 1.26 | 2.88 |
| 33 (CONTROL) | 1.00 | 1.00 | 1.00 |
| 34 | 1.05 | 1.17 | 1.16 |

TABLE IV

| | without mixers | with 26 4x4 Ross ISG's |
|---------------------------------------|----------------|------------------------|
| RV range | 0.08 | 0.01 |
| Amino End Group Range (meq/kg) | 2.5 | 0.3 |
| Kiton Dye Junction* Range | 5 | 0-1 |
| Warping Defects per Million End Yarns | 280 | <0.3 |

*A dye junction is the minimal visual difference in dye depth discernable to the human eye.

TABLE V
USE OF ADDITIVES IN A CLASSICAL 2-STAGE PROCESS
(i.e. spin lag draw)

| EXAMPLE NUMBER | \pm H ₂ O | RV | AMINO END GROUPS (meq/Kg) | CARBOXYL END GROUPS (meq/Kg) | Σ EXTRACT IN MeOH | SPINNING SPEED (M/MIN) | DRAW* RATIO (Σ) | ELONGATION (Σ) | L-10 BREAKING LOAD 10% ELONG. (gm) | NORMALIZED Δ E CIELAB FOR KITON DYE AFTER ONE WASHING |
|-------------------|------------------------|------|------------------------------------|---------------------------------------|--------------------------------|------------------------------|--------------------------------|----------------------------|--|---|
| 87 | -0- (Control) | 2.80 | 32.1 | 54.3 | 1.58 | 800 | 2.70 | 46.8 \pm 5.7 | 108 \pm 13 | 1.00 |
| 88 | 0.37 | 2.75 | 33.1 | 54.4 | 1.65 | 800 | 2.70 | 50.5 \pm 4.6 | 100 \pm 11 | 1.02 |
| 89 | 0.74 | 2.67 | 35.1 | 55.4 | 1.81 | 800 | 2.70 | 54.9 \pm 2.1 | 100 \pm 3 | 0.92 |
| 90 | 1.48 | 2.50 | 43.4 | 65.0 | 1.91 | 800 | 2.70 | 61.8 \pm 4.8 | 84 \pm 1 | 0.88 |
| 91 | 2.21 | 2.34 | 48.7 | 70.0 | 1.76 | 800 | 2.70 | 61.2 \pm 7.7 | 77 \pm 4 | 0.91 |
| 92 | 2.95 | 2.33 | 51.3 | 72.2 | 1.80 | 800 | 2.70 | 67.8 \pm 8.0 | 75 \pm 2 | 0.92 |

*Draw ratio set to yield approximately 50% elongation for the control example (87).

TABLE VI

UNIFORMITY OF DRY YARN CHEMICAL PROPERTIES

6

| ADDITIVE TYPE | AMOUNT | CHIP TYPE | RV | YARN CHEMICAL PROPERTIES AMINO END GROUPS (Meg/kr) | METHANOL EXTRACTABLES (%) |
|------------------------|--------|--------------|----------|--|---------------------------------|
| H ₂ O | 1.5% | B300 | 2.46±.01 | 44.5±0.3 | 1.65±.08 |
| Triethylcse- Glycol | 3.0% | B300 | 2.45±.01 | 42.9±0.2 | 2.81±0.14 |
| H ₂ O | 0.5% | B216 | 2.28±.01 | 36.5±0.4 | 1.45±0.24 |

15

TABLE VII

POLYMER ORIENTATION

20

| EXAMPLE NO. | BIREFRINGENCE | SONIC MODULUS (N/cm ² × 10 ⁹) | DENSITY (g/cc) | XTAL | f _c | f _a Bir | SIZE EQUITORIAL (A) | η |
|--------------|---------------|--|-------------------|------|----------------|--------------------|---------------------------|-----|
| 10 (control) | 0.0346 | 4.65 | 1.1285 | 46 | 0.86 | 0.20 | 56.1 | 91 |
| 15 | 0.0358 | 4.78 | 1.1300 | 48 | 0.67 | 0.20 | 49.7 | 100 |
| 16 | 0.0377 | 4.80 | 1.1285 | 46 | 0.86 | 0.28 | 43.1 | 89 |
| 51 (control) | 0.0368 | 4.42 | 1.1305 | 51 | 0.82 | 0.24 | 32 | 75 |
| 52 | 0.0381 | | 1.1305 | 51 | | 0.28 | 31 | 75 |
| 53 | 0.0384 | | 1.1310 | 50 | | 0.30 | 30 | 70 |
| 54 | 0.0394 | | 1.1315 | 50 | | 0.32 | 29 | 69 |

35

40 Claims

1. A melt-spinning process for the production of polyamide filaments characterised by the steps of:
 - (a) Mixing an additive into a melt-spinnable polyamide polymer, so that the resulting polymer mix is homogenous, the additive having a molecular weight less than 400 and being a member selected from the group consisting of water, alcohols, and organic acids, the additive being mixed in an amount so that on extrusion, the molten polymer mix has a relative viscosity between 2.0 and 3.0 as measured in 96% sulphuric acid) and, when it is water, the additive being present in the mix in an amount greater than 0.15% by weight;
 - (b) extruding the resulting molten polymer mix through a spinnerette so that polyamide filaments are formed;
 - (c) quenching the so formed filaments; and
 - (d) taking up the quenched filaments at a speed which is greater than 3200 meters per minute.
2. A process as claimed in Claim 1 characterised in that the resulting filaments have a tex (denier) per filament of less than 1.333 (12).
3. A process as claimed in claim 1 or 2, wherein the resulting filaments have a tex (denier) per filament of less than 0.388 (3.5).

55

4. A process as claimed in any of Claims 1 to 3, wherein the additive is water and the polymer is polycaprolactam.
- 5 5. A process as claimed in Claim 4 characterised in that on extrusion the relative viscosity of the molten polymer mix is between 2.2 and 2.6.
6. A process as claimed in any of claims 1 to 5 characterised in that the filaments are drawn to a draw ratio between 1.02 and 3.0.
- 10 7. A process as claimed in claim 6, characterised in that the drawn ratio is between 1.02 and 1.45.
8. An improved polycaprolactam filament, the improved filament exhibiting an improved washfastness, the improved washfastness being exhibited by the filament having a normalized ΔE (CIELAB) greater than 1.0, 1.0 being the ΔE (CIELAB) of a filament produced according to a method which differs from the method of Claim 1 in omitting the mixing of the additive into the melt-spinnable polymer.
- 15

Revendications

1. Procédé de filage à l'état fondu pour la production de fibres de polyamide, procédé caractérisé en ce qu'il comprend les différentes étapes consistant à :
 - (a) mélanger un additif à un polymère de polyamide filable à l'état fondu, de façon que le mélange de polymère obtenu soit homogène, l'additif présentant un poids moléculaire inférieur à 400 et consistant en un élément choisi dans le groupe comprenant l'eau, les alcools et les acides organiques, cet additif étant mélangé dans une proportion telle qu'à l'extrusion le mélange de polymère fondu présente une viscosité relative comprise entre 2,0 et 3,0 lorsqu'elle est mesurée dans de l'acide sulfurique à 96 %, et l'additif, lorsqu'il s'agit de l'eau, étant présent dans le mélange en proportion supérieure à 0,15 % en poids;
 - (b) extruder le mélange de polymère fondu obtenu à travers une filière de manière à former des fibres de polyamide ;
 - (c) tremper les fibres ainsi formées ; et
 - (d) enrouler les fibres trempées à une vitesse supérieure à 3.200 mètres par minute.
2. Procédé selon la revendication 1, caractérisé en ce que les fibres obtenues présentent une valeur de tex (denier) par fibre de moins de 1,333 (12).
3. Procédé selon l'une quelconque des revendications 1 et 2, caractérisé en ce que les fibres obtenues présentent une valeur de tex (denier) par fibre de moins de 0,388 (3,5).
4. Procédé selon l'une quelconque des revendications 1 à 3, caractérisé en ce que l'additif est de l'eau et en ce que le polymère est du polycaprolactam.
5. Procédé selon la revendication 4, caractérisé en ce qu'à l'extrusion, la viscosité relativement du mélange de polymère fondu est comprise entre 2,2 et 2,6.
6. Procédé selon l'une quelconque des revendications 1 à 5, caractérisé en ce que les fibres sont étirées avec un taux d'étirage compris entre 1,02 et 3,0.
7. Procédé selon la revendication 6, caractérisé en ce que le taux d'étirage est compris entre 1,02 et 1,45.
8. Fibre de polycaprolactam perfectionnée, cette fibre perfectionnée présentant une solidité au lavage améliorée, cette solidité au lavage étant présentée par la fibre de ΔE normalisé (CIELAB) supérieur à 1,0, ce 1,0 étant le ΔE (CIELAB) d'une fibre produite par un procédé différent de celui de la revendication 1 en ce qu'on supprime le mélange de l'additif au polymère filable à l'état fondu.

Patentansprüche

1. Schmelzspinnverfahren zur Herstellung von Polyamidfilamenten, gekennzeichnet durch folgende Schritte:

- 6 (a) Einmischen eines Zusatzmittels in ein schmelzspinnbares Polyamidpolymer, so daß das erhaltene Polymergemisch homogen ist, wobei das Zusatzmittel ein Molekulargewicht von weniger als 400 aufweist und ausgewählt wurde aus der Gruppe bestehend aus Wasser, Alkoholen und organischen Säuren, und wobei das Zusatzmittel in einer Menge eingebracht wird, so daß bei Extrusion das geschmolzene Polymergemisch eine relative Viskosität zwischen 2,0 und 3,0 (gemessen in 96% Schwefelsäure) aufweist, und, wenn das Zusatzmittel Wasser ist, es in dem Gemisch in einer Menge von mehr als 0,15 Gewichtsprozent vorhanden ist;
- 10 (b) Extrudieren des erhaltenen geschmolzenen Polymergemisches durch eine Spinnndüse, so daß Polyamidfilamente gebildet werden;
- (c) Abschrecken der derart gebildeten Filamente; und
- (d) Aufwickeln der abgeschreckten Filamente mit einer Geschwindigkeit von mehr als 3200 Metern pro Minute.
- 15 2. Verfahren nach Anspruch 1, dadurch gekennzeichnet, daß die erhaltenen Filamente ein Tex (Denier) von weniger als 1,333 (12) pro Faden aufweisen.
3. Verfahren nach Anspruch 1 oder 2, worin die erhaltenen Filamente ein Tex (Denier) von weniger als 0,388 (3,5) pro Filament aufweisen.
- 20 4. Verfahren nach einem der Ansprüche 1 bis 3, worin das Zusatzmittel Wasser und das Polymer Polykaprolaktam ist.
5. Verfahren nach Anspruch 4, dadurch gekennzeichnet, daß bei Extrusion die relative Viskosität des geschmolzenen Polymergemisches zwischen 2,2 und 2,6 beträgt.
- 25 6. Verfahren nach einem der Ansprüche 1 bis 5, dadurch gekennzeichnet, daß die Filamente auf ein Streckverhältnis zwischen 1,02 und 3,0 gestreckt werden.
7. Verfahren nach Anspruch 6, dadurch gekennzeichnet, daß das Streckverhältnis zwischen 1,02 und 1,45 beträgt.
- 30 8. Verbessertes Polykaprolaktamfilament, wobei das verbesserte Filament eine verbesserte Waschechtheit aufweist und sich die verbesserte Waschechtheit in dem Filament durch einen normierten E (CIELAB) größer 1,0 zeigt, wobei 1,0 der E (CIELAB) eines Filaments ist, das nach einem Verfahren hergestellt wurde, das sich von dem Verfahren aus Anspruch 1 dadurch unterscheidet, daß es ohne Einrühren von Zusatzmittel in das schmelzspinnbare Polyme ausgeführt wurde.
- 35
- 40
- 45
- 50
- 55

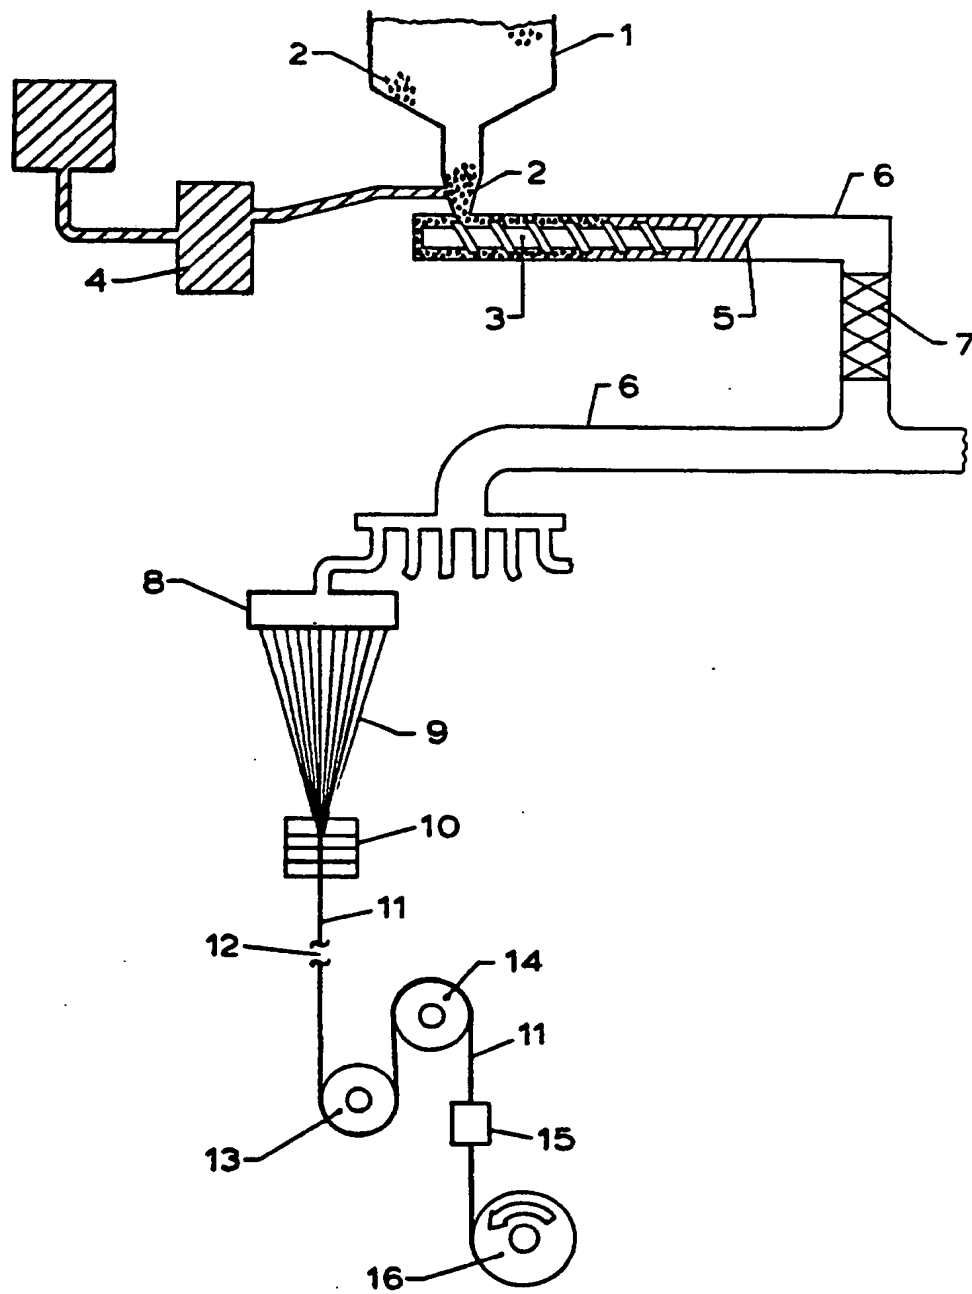


FIGURE 1

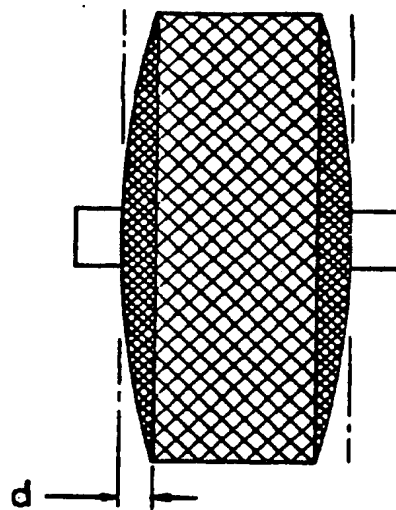


FIGURE 2

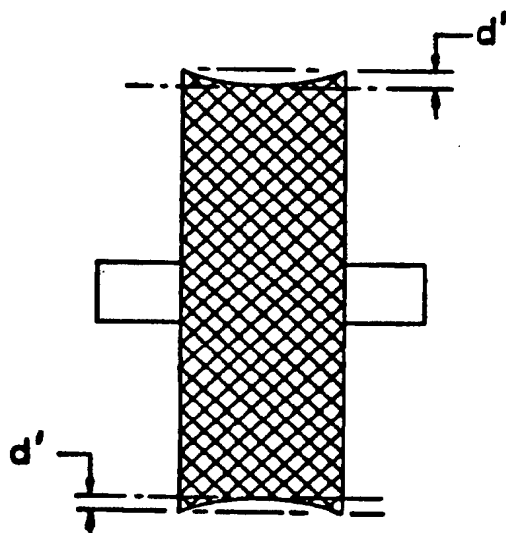


FIGURE 3

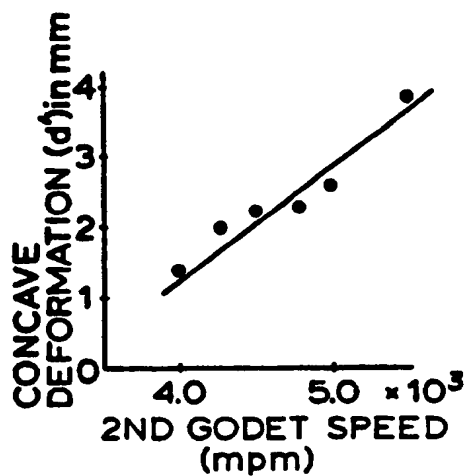


FIGURE 4

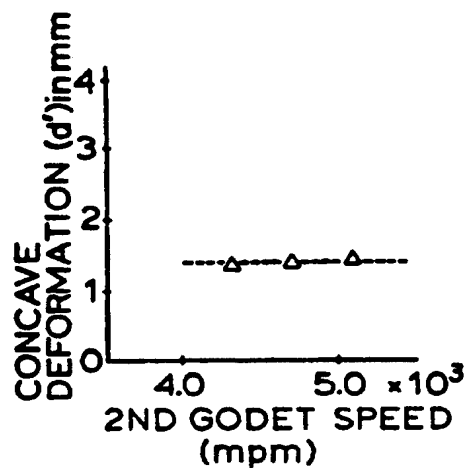


FIGURE 5

KEY for FIGS. 4 - 6

| | CHIP | DRAW | ADDITIVE | DEN/FIL |
|---|------|------|------------------|---------|
| • | B300 | 1.0 | NONE | 3.3 |
| Δ | B300 | 1.0 | H ₂ O | 3.3 |
| ◦ | B216 | 1.0 | H ₂ O | 3.3 |
| x | B216 | 1.0 | H ₂ O | 1.4 |

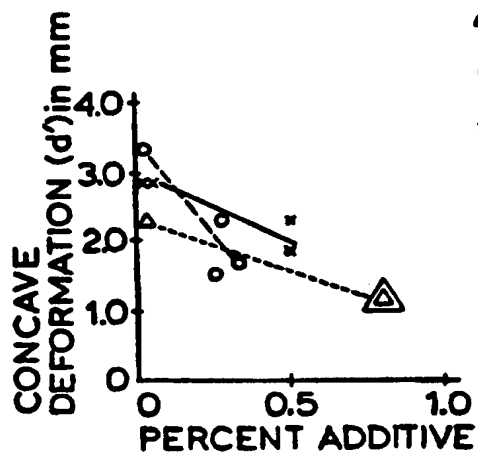


FIGURE 6

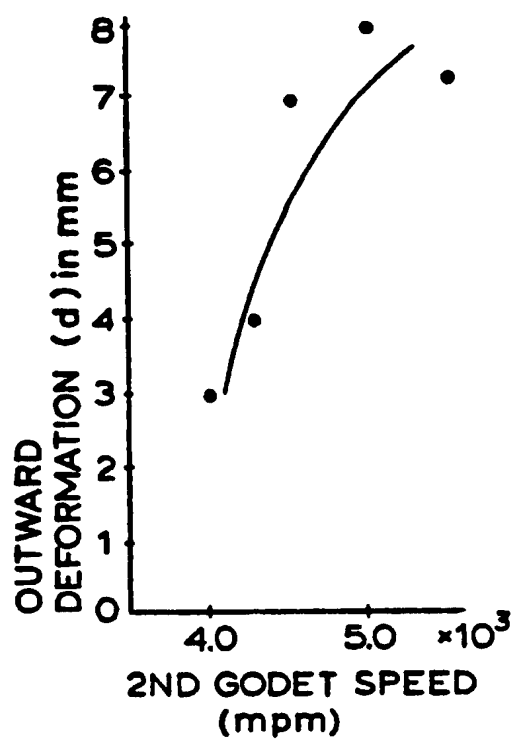


FIGURE 7

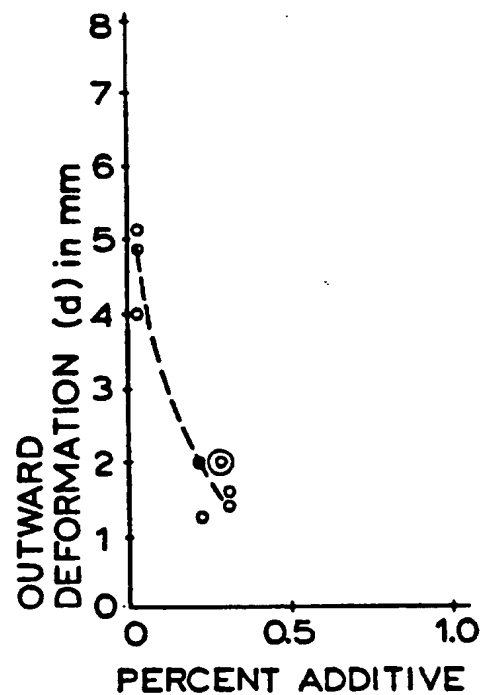


FIGURE 8

KEY for FIGS. 7 & 8

| | CHIP | DRAW | ADDITIVE | DEN/FIL | TAKE UP SPEED |
|---|------|------|------------------|---------|---------------|
| • | B300 | 1.0 | H ₂ O | 3.3 | — |
| • | B216 | 1.0 | H ₂ O | 3.3 | 5000 |